


RVON-2 (90027877000) Quick Start Guide (KP 32 CLD)

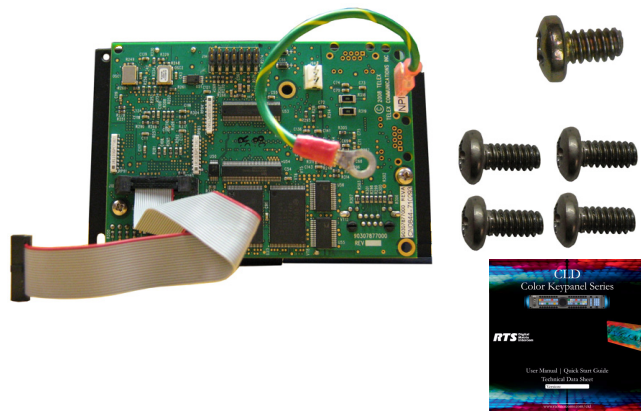


INCLUDED PARTS:

- KP 32 CLD RVON-2 Option Card (90207877000)
- 1 – Screw, PH, 6X32, .25"
- 4 – Screw, PH, 4X40, .25"
- KP CLD Resource Disk

KP 32 CLD Installation


To install the RVON-2 Option Card into the KP 32 CLD, do the following:

1. **Power OFF** the KP 32 CLD.
2. Using a screwdriver, remove the **four (4) screws** holding the blank KP 32 CLD Option plate designated for the RVON-2 Option Card.

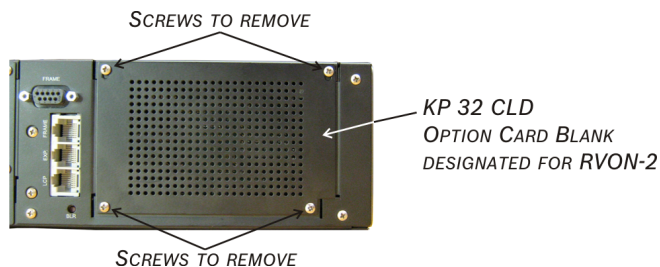


3. Securely connect the RVON-2 option card ribbon cable to **J18** of the KP 32 CLD main board.


CAUTION: Do NOT connect the ribbon cable backwards, unintended results may occur.

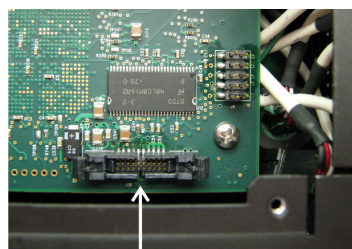

J18
CONNECTOR

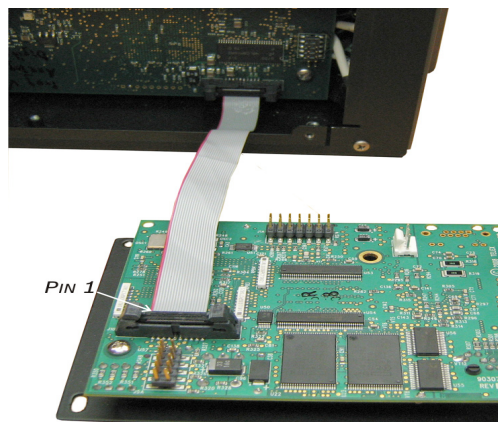


4. Using a screwdriver, connect the **RVON-2 ground strap** using the specified screw to the corner ground post in the KP 32 CLD.

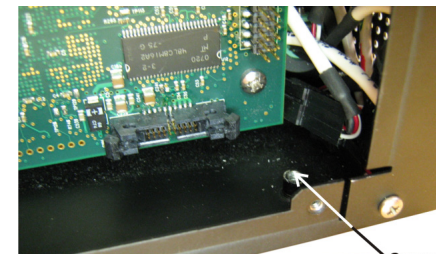

CORNER
GROUND
POST

5. Insert the **bottom edge** of the RVON-2 option card in the KP 32 CLD unit.

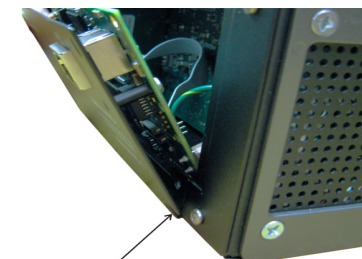

BOTTOM
EDGE OF
RVON-2
OPTION CARD

6. Carefully tilt the **top edge** of the RVON-2 option card to be flush with the KP 32 CLD unit.
7. Line up the **screw holes of the RVON-2 option card** with the screw holes on the KP 32 CLD unit.
8. Using a screwdriver, **replace the screws**, securing the RVON-2 option card in place.
9. Power ON the KP 32 CLD unit.

NOTE:For specific operation instructions, see the KP CLD User's Manual (part number 93507858000).