

# BC-300NM1 BATTERY CHARGER

## SPECIFICATIONS

Applications..... Recharge Nickel-metal  
hydride batteries in TR-300's

Input ..... 120 volts, 60Hz

Output ..... 8.7VDC @ 100mA

Output Cord ..... 6ft with 2.5mm plug

Approvals ..... UL and CSA

### **Battery-Specifications**

Type ..... Nickel-metal hydride, 1500mAh

Size ..... AA

## OPERATIONS


Insert the plug into the jack on the side of the TR-300. Plug the charger into a 110 Volt AC receptacle.

**CAUTION**

**Do not attempt to charge any alkaline batteries with this charger.**

Full charge of the battery pack is obtained after 12 to 14 hours. A full charge will last 15 to 17 hours.

Extensive over-charging may damage or destroy the batteries. Please ensure the charging time does not exceed 24 hours.

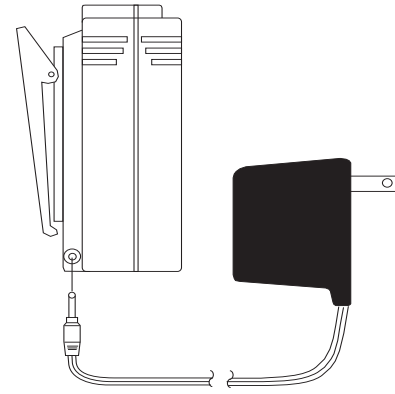

## ORDER INFORMATION

BC300NM1, BC300NM1 BATTERY CHARGER w/6NMH BATT&SLE

Form Number: F01U187385 Rev 02  
Date: February 2013

# BC-300NM1 BATTERY CHARGER

## SPECIFICATIONS

Applications..... Recharge Nickel-metal  
hydride batteries in TR-300's

Input ..... 120 volts, 60Hz

Output ..... 8.7VDC @ 100mA

Output Cord ..... 6ft with 2.5mm plug

Approvals ..... UL and CSA

### **Battery-Specifications**

Type ..... Nickel-metal hydride, 1500mAh

Size ..... AA

## OPERATIONS


Insert the plug into the jack on the side of the TR-300. Plug the charger into a 110 Volt AC receptacle.

**CAUTION**

**Do not attempt to charge any alkaline batteries with this charger.**

Full charge of the battery pack is obtained after 12 to 14 hours. A full charge will last 15 to 17 hours.

Extensive over-charging may damage or destroy the batteries. Please ensure the charging time does not exceed 24 hours.

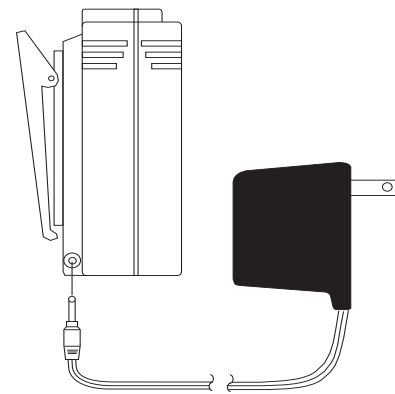

## ORDER INFORMATION

BC300NM1, BC300NM1 BATTERY CHARGER w/6NMH BATT&SLE

Form Number: F01U187385 Rev 02  
Date: February 2013