


PAP-32

Program IFB Assignment Panel



The PAP-32 provides the user with the ability to assign multiple program sources to over 16 different IFB destinations. Through the use of standard EKP-32 expansion panels, the PAP-32 can be extended to up to 64 program sources and 64 IFB destinations. The PAP-32 works with ADAM-M, ADAM, ADAM-CS, Cronus and the Zeus intercom matrix systems.

Line Drawing

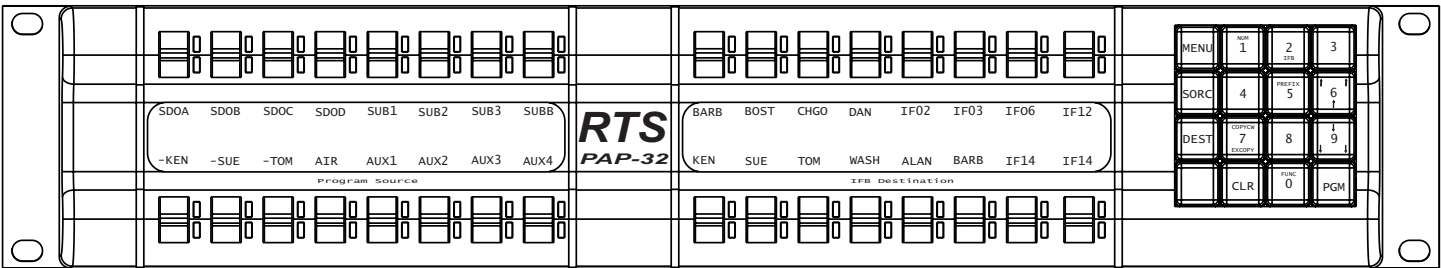

## Specifications

### Matrix Connectors

DB-9S Female

RJ-12 Female

### Power Requirements

100–240VAC, 50/60Hz, 1A

### Environmental

Operating Temperature

0°C to 50°C

Storage Temperature

-20°C to 75°C

Humidity (Operating & Storage):

0 to 95%, non-condensing

### Dimensions

3.44" (88mm) H

19" (483mm) W

3.5" (89mm) D

### Weight

5.5 lbs. (2.5kg)

### Finish

Thermoplastic front panel, aluminum case and rear panel, light gray finish

## Order Information

PAP-32LK • PAP-32LK • Program IFB assignment panel

PAP32PB • PAP-32PB • Program IFB assignment panel

This specifications information is preliminary and is subject to change without notification.  
Brand names mentioned are the property of their respective companies.