



### 4012 System Interconnect

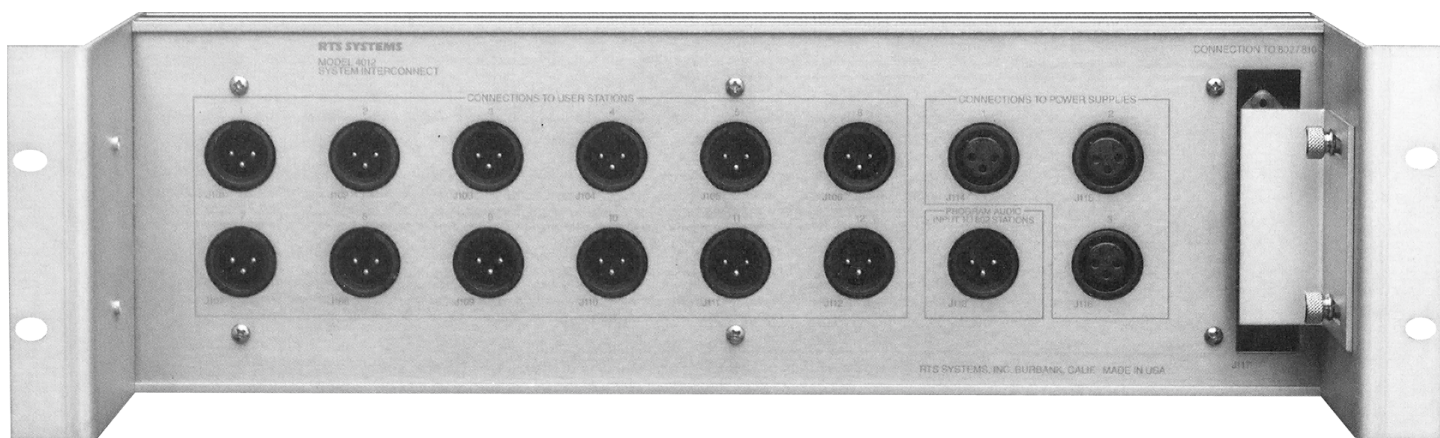

The RTS Model 4012 System Interconnect is a 19 inch, 3 **RU** (Rack Unit) system interconnect. It has a 50-pin to 3-pin XLR connector transition assembly. The 4012 is used with the 800 Series Master Stations. The 4012 translates the 50-pin connectors to 12, 3-pin XLR male connectors. Additional connectors are provided to apply power to XLR connectors.

### Line Drawing

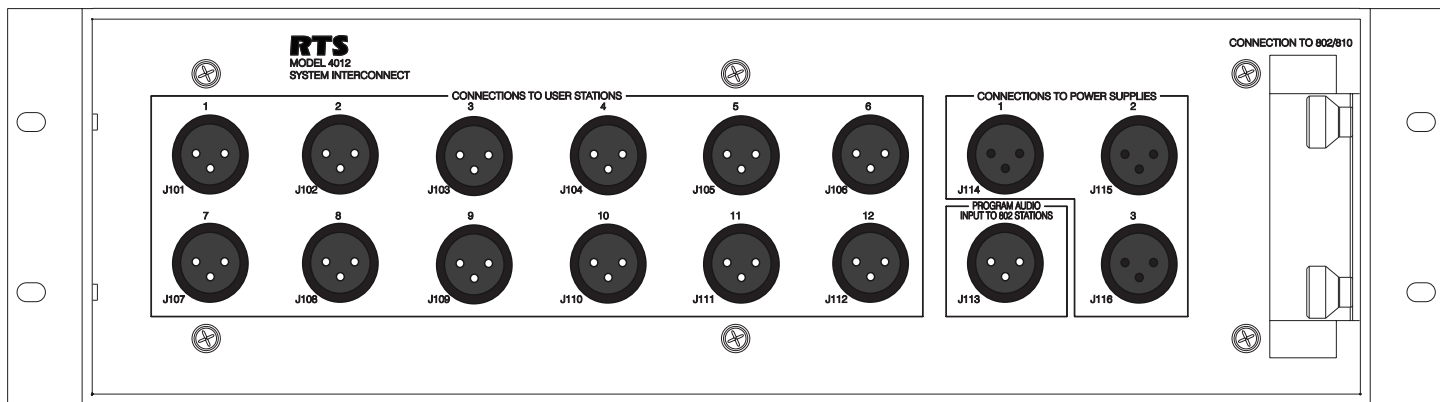

## Specifications

### Electrical Specifications

Rated Voltage: 50VDC

Dielectric Strength: >1.5kVDC

Maximum Rated Current: 4 Amps

Temperature: 0°C to 50°C (32°F to 122°F)

Connections:

Quantity	Type
1	50-pin ribbon connector
12	3-pin XLR male I/O connector
3	3-pin XLR female power supply connectors
1	3-pin female program input connector

## Order Information

4012 • 4012 System Interconnect • 50-pin to 3-pin XLR connector transition system interconnect

The specification information is preliminary and is subject to change without notification.  
Brand names mentioned are the property of their respective companies.

Bosch Security Systems, Inc. | 12000 Portland Avenue South | Burnsville, Minnesota 55337  
Telephone: 877-863-4169 | Fax: (800) 323-0498  
Form Number: F01U241411 Rev 02  
Date: February 2013

**RTS**  
www.rtsintercoms.com